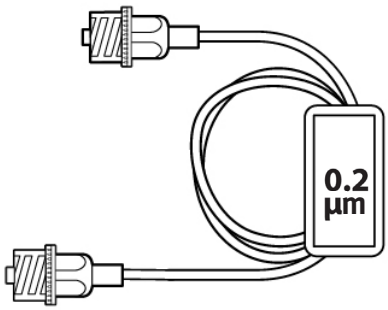


21-7044-24

CADD™ extension set with male/male luer, 0.2-micron air-eliminating filter and integral anti-siphon valve with clamp

Technical Specifications

- Tubing length: 140 cm (55 in)
- Priming volume: 4 mL
- Plasticiser: TOTM (DEHP-free)
- Distal connector: Male luer
- Tubing colour: Clear
- Filter size: 0.2 micron

Set Advantages

- CADD extension set is integrated with an anti-siphon valve for protection against the free-flow of fluids and to prevent unauthorised drug pull from sets via a syringe.

Safety

- Components are not made with DEHP or natural rubber latex.

Component Highlight

- 0.2-micron filter helps in removing air, bacteria, particulate matter, and other contaminants from the medication or fluid.
- The rectangular shaped filter allows for more filtration material, making them suitable for applications where high-volume filtration is necessary.

Packaging

- Case quantity: 25 units/box
- Shelf life: 5 years

Sterilisation method

Ethylene oxide (EO)

Legal Manufacturer

ICU Medical, Inc.
6000 Nathan Lane North
Minneapolis, MN 55442, USA

Replacement Requirements

Change according to CDC guidelines or according to your institution's policy.


GMDN Code	EU Risk Class	EU Rule
12170	IIa	2

The product complies with current legislation and has the corresponding CE marking (2797).
For additional information, warnings and/or safety precautions, refer to the Instructions for Use.

icumedical
human connections

© 2025 ICU Medical, Inc. |

+44 (0)845 850 0445 | www.icumed.com

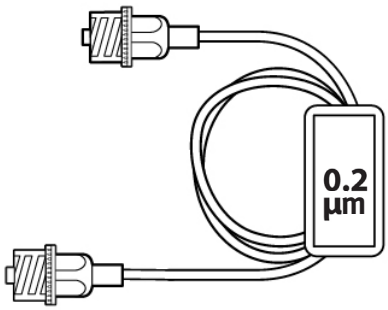

21-7044-24

CADD™ extension set with male/male luer, 0.2-micron air-eliminating filter and integral anti-siphon valve with clamp

Component Composition	
All Tubing*	PVC with TOTM (DEHP-free)
Pinch Clamp	Acetal
Male Connector Shroud Female Cap for Male Connector	Low-density polyethylene (LDPE)
Male Luer*	ABS
Air-Eliminating Filter* Liquid Membrane (0.2 µm) Air Vent Membrane (0.03 µm) Housing	 PES **Effective Filtration Area: 10.0 cm^2* PTFE Acrylic
ASV, Valve Cap	Low-density polyethylene (LDPE)
ASV* Membrane Connector Cap Male Luer Lock Male Luer Lock Outlet Inlet: Threaded Male Connector	 Silicone ABS Low-density polyethylene (LDPE) Polycarbonate Polycarbonate
Solvents Used	Cyclohexanone Methylene chloride
Pouch Materials	
Tyvek® PTH-291 Bottom Stock Plaspac 1325TLLS	
Carton Box	
27 cm x 15 cm x 15 cm (10.75“ x 6“ x 6“)	

*Fluid path

Tyvek is a trademark of DuPont Safety & Construction, Inc.

The product complies with current legislation and has the corresponding CE marking (2797).
For additional information, warnings and/or safety precautions, refer to the Instructions for Use.

icumedical
human connections

© 2025 ICU Medical, Inc. |

+44 (0)845 850 0445 | www.icumed.com